

C&G No. 3-A DELUXE MODEL SAW TRIMMER C-16 Index Dial with screws..... C-14-1 Pica Screw Knob with screws..... C-17 Index Dial Spring and Ball..... Recognized by printers everywhere as the most 1.00 versatile saw trimmer ever designed. Its many .10 E-38 PICA GAUGE ASSEMBLY E-39 Pica Gauge Pin E-39-1 Pica Gauge Pin E-40 Latch Nut Screw E-41 Latch Nut Screw Spring E-42 Latch Nut Screw Spring E-43 Latch Lever Pin E-44 Latch Lever Pin time-saving features place it far in advance of 8.00 4.65 .05 1.75 all others. Engineered to eliminate waste motion, and constructed of the finest materials. You will find the conveniences you have al-.55 .70 ways wanted in this machine.

 Image: Rest of the second state of Any compromise with accuracy and safety in selecting a saw trimmer can result only in ultimate dissatisfaction. If your present equipment is old and obsolete, you are paying E-54 VISE JAW BAR ASSEMBLY..... E-56 Vise Jaw Bar Dog (insert)..... for one of these new models with 3.50 lost time. Send for literature. E-54-1 EXTENSION VISE JAW BAR ASSEMBLY SPECIFICATIONS: Size of table.....30"x18" Heighth from floor..... 371/2" E-72 MITER GAUGE ASSEMBLY 8.75

 2 MITTER GAUGE ASSEMBLY
 5.75

 E-73 Miter Gauge Base
 2.75

 E-74 Miter Gauge Screw
 55

 E-75 Miter Gauge Nut
 1.90

 C-14-1 Miter Gauge Knob, with screw
 1.00

 C-16 Miter Gauge Index Dial, with screw
 1.55

 C-17 Index Dial Spring and Ball
 10

 E-80 Miter Gauge Lock Screw Knob, with screw
 .25

 Net weight, complete equip-Standard Equipment: 73 Pica Gauge and Work Holder. Miter Gauge (standard), Miter Vise right and left hand, 6" Saw Blade Assembly (64 swaged teeth) with head and trimmer knives, 6" Saw Blade (64 swaged teeth), 4" Emery Wheel and Guard, Adjustable Lighting Fixture, Screw Driver, Open End Wrench and Spanner Wrench, No. 20 Waste Receptacle, iron wheels, V Belt, % HP, 110 or 220 AC or DC Motor, with cord and plug. Price \$398.00. Deluga Fouriement, 72 Diag Course and Work Hold a IGHT AND LEFT HAND MITER VISE ASSEMBLY RL-1 RIGHT Define Equipment: 73 Pica Gauge and Work Holder, Miter and Lineup Gauge, Miter Vise right and left hand. 5½" Universal Saw Blade Assembly, with head and trimmer knives (30 formed teeth), 5½" Universal Saw Blade (only). 4" Emery Wheel and Guard, Saw Grinder for Universal Blades with Emery Wheel, Cutter Grinder, 135 Pica Ex-tension Gauge, Extension Vise Jaw Bar, No. 20 Waste Receptacle, iron wheels, Screw Driver, Open End Wrench and Spanner Wrench, V Belt, ½ HP, 110 or 220 volt, AC or DC motor, with cord and plug. Price \$475.00. ML-1 MITER AND LINEUP GAUGE ASSEMBLY...... 22.50 ML-5 ML-6 ML-7 ML-8 55 5.45 .25 ML-6 Slide, with screws ML-7 Gib ML-8 Slide Far, with screw ML-10 Base ML-10 Base ML-11 Miter Gauge Screw ML-12 Miter Gauge Screw ML-12 Miter Gauge Screw C-17 Index Dial Spring and Ball C-16 Index Dial with screw C-14-1 Knob, with screw ML-19 Miter and Lineup Clamp Assembly (new style) ML-20 Clamp Sleeve, with screw ML-21 Clamp ML-22 Handle .55 30 1.80 .95 .85 .10 1.00 1.45 .55 .15 PE-1-1 PICA EXTENSION GAUGE ASSEMBLY

 PE-18 PICA GAUGE SLIDE ASSEMBLY.

 PE-19 Pica Gauge Slide

 E-39-1 Pica Gauge Pin

 E-40 Latch Nut

 E-41 Latch Nut Screw, with screw

 E-42 Latch Nut Screw Spring

 E-43 Latch Lever

 E-44 Latch Lever

 E-44 Latch Lever

 E-44 Latch Jever Pin

 E-44 Latch Jever

 7.253.90 .05 1.75 .25 .25 .70 .60 .50

C-129 Toggle Switch C-132 No. 20A Plain Outlet Box Cover, punched..... E-133 Adjustable Lighting Fixture C-134 Cord 10 ft. long E-36 Drive Sheave for motor E-37 V-belt È-36 E-37


1.30 .25 5.40

1.90

	MODEL NO. 3-A PARTS
E-1-1 Stop	Pin (gauge frame and saw arm)\$.30
E-88 Tabl	c Slot Bar (for shell plate work) 5.50
E-89 Tabl	e Plug (use in place of PE-16)
E-31 Sub- E-32 Sub-	Table, with oiler
E-33 Was	
	ar, with screw
	Guard 7.80
E-70-1 Frict	tion Collar Assembly 1.90
E-70 Frict	tion Collar with screw and nut 1.60
E-71 Frict	tion Collar Spring and Screw
E-4 SAW 1	BRACKET ASSEMBLY (complete) 54.00
E-5	Saw Bracket, arm only 24.00
	Lock Bushing Assembly
E-5-3 C-112	Felt Wicking, for saw oiler
C-170	Oiler Cover for saw
C-171	Mandrel Pulley
Č-172	Rear Retainer for Mandrel
C-173	Front Retainer for Mandrel
C-174	Spacer for Front Retainer
C-175	Ball Bearing 2.10
C-161 C-25	Felt Washer
C-25 C-26	Cover Plate
C-29-1	Mandrel Nut and Washer
C-31	Emery Wheel Washer
C-33	Emery Wheel Guard 1.85
C-34	Emery Wheel (½"x½"x1" plain) 1.25
E-20	Index Pin
E-21	Index Spring
E-22 E-23	Index Pin Head (knurled)35
E-23 E-24	Lock Screw
E-25	Hand Nut
E-58 GAUG	E AND WORKHOLDER ASSEMBLY \$57 00
E-58-1 E-59	Gauge Frame Assembly 34.50
E-59-1	Gauge Frame
E-59-2	Friction Plug
E-59-3	Friction Spring
F2-60	Strip, with screws 1.05
E-61	Scale 1.40
E-62	Bearing
E-63 E-64	Bearing Clamp with screw
E-65	Pica Screw 4.90 Keeper with screws
	Reeper with screws

2

.

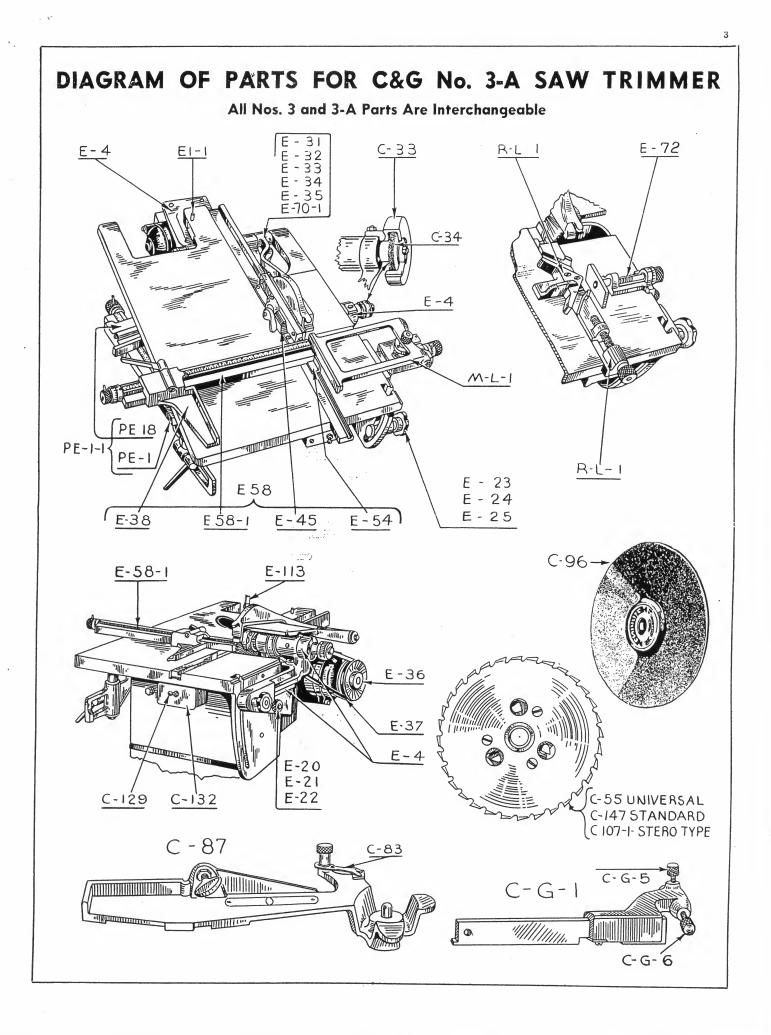

C&G No. 2 PEDESTAL



Sturdiness of construction and low cost of operation is evidenced by reports from thousands of No. 2 C&G saw trimmer users throughout the United States and foreign countries.

It is fast in action, positive in accuracy, constructed of the finest materials, and its safety features reduce the possibility of injury to the operator to a minimum.

Send for literature.

SPECIFICATIONS:

Size of table.....14½"x18" Heighth from floor......36"

Standard Equipment: 60 Pica Gauge and Work Holder, Miter Vise, Miter Gauge, Side Table Extension, Sub-Table, Dust Basin, 4" Emery Wheel and Guard, 6" Saw Blade Assembly (64 swaged teeth with head and trimmer knives), 6" Saw Blade (64 swaged teeth), Spanner Wrench, Open End Wrench. Screw Driver, V-Belt, Motor ¼ HP, 110 or 220 volt, AC or DC, with cord and plug. Price \$250.00.

.Universal Equipment: 60 Pica Gauge and Work Holder, Miter Vise, Miter Gauge, Side Table Extension, Sub-Table, Dust Basin, 4" Emery Wheel and Guard, 5½" Universal Saw Blade (30 formed teeth) with head and trimmer knives. Saw Grinder for Universal Blades with Emery Wheel, Trimmer Grinder, Saw Blade Oiler, Spanner Wrench, Open End Wrench, Screw Driver, V-Belt, Motor ½ HP, 110 or 220 volt, AC or DC, with cord and plug. Price \$273.00.

MODEL NO. 2 PARTS


MODEL NO. 2 FARTS	
C-43 Rear Table Extension, installed at factory\$21.5 C-61 Sub-Table	50 75
C-79 TABLE CLAMP ASSEMBLY (complete) 2.3 C-68 Stud, with washer	25 90
C-78 ELEVATING BRACKET ASSEMBLY (complete)	25 75 55 50 30
C-89 MOTOR BRACKET ASSEMBLY (complete)	35 10 30
C-186 UNIVERSAL MOTOR BRACKET ASSEMBLY (complete) 9.2 C-118 Motor Bracket, with bolts and washers	5
C-69 TABLE, WITH SCREWS	87 15
C-106 SAW GUARD AND STUD ASSEMBLY (complete)5.5 C-38 Saw Guard	0
C-94 GAUGE AND WORKHOLDER ASSEMBLY (complete)	10 15 10 10 10 10 10 10 10
C-22 VISE ASSEMBLY	5

MODEL SAW TRIMMER C-4 Vise Clamp Bar. 1.65 C-5 Eccentric Silde .60 C-6 Eccentric Bearing 1.25 C-7 Vise Spring .25 C-39 PICA GAUGE ASSEMBLY. 6.00 C-18 Pica Gauge 4.00 C-19 Latch Nut Lever. 35 C-20 Latch Nut. 1.50 C-21 Latch Nut Spring. .15 C-97-1 EXTENSION VISE JAW BAR ASSEMBLY (clamps 8-in.) 6.00 C-50 MITER GAUGE ASSEMBLY (complete) 8.75 C-46 Miter Gauge Base 2.45 C-47 Miter Gauge Pica Screw 1.90 C-48 Miter Gauge Pica Screw 1.75 C-16 Point Index 1.55 C-17 Spring and Bail .10 C-14-1 Knurled Knob with screw 1.00 C-45 MITER VISE ASSEMBLY. 4.00 C-41 Miter Vise Jaw. 1.40 C-42 Miter Vise Base, with screw and pin. 2.35 C-44 Miter Vise Hinge Pin. .25 C 120 Teorein Switch .25 C-129 Toggle Switch 1,25 C-132 Outlet Box Cover, punched for switch 25 C-134 Type "S" Cord, 10 ft. long with plug. 85 C-178 Drive Sheave for motor 1,75 C-177 V-Belt 1.80 C-100 Open End Wrench 60 C-109 Screw Driver 50 C-176 Spanner Wrench 75 P-25 150 PICA GAUGE ASSEMBLY (complete) 21.00 P.1-1 Gauge Body, Spacing Rod and Guide 6.50 P.3 Indicator Plate With screws .85 P-5-1 Clamp Bracket Assembly 3.25 P-9 Pica Nut .60 P-19 Filler Block with pin 1.10

SUPPLIES----MODELS 1, 2, 3 AND 3-A (Always give serial number of machine)


C-107-1 STEREOTYPE SAW BLADE ASSEMBLY (complete) C-107 Stereotype Saw Blade (32 swedged teeth) 6-in. diam C-90 Saw Head with screws C-35 Trimmers @ 40c (set of 3) C-36 Trimmer Clamps. (set of 3)	1.20 3.90 1.20 .40	10.00 4.50
C-147 STANDARD SAW BLADE ASSEMBLY (complete) C-52 Saw Blade (64 swedged teeth) 6" diam C-90 Saw Head with screws C-35 Trimmers @ 40c (set of 3) C-36 Trimmer Clamps (set of 3)	3-50	9.50 4.00
C-55 UNIVERSAL SAW ASSEMBLY (complete) C-53 Universal Saw Blade (30 formed teeth) 5½" diam C-57 Universal Saw Head with screws C-35 Trimmers @ 40c (set of 3) C-36 Trimmer Clamps (set of 3)	8:00 3.90 1.20	14.50 9.00
C-87 UNIVERSAL SAW BLADE GRINDER (complete) C-82 Shoulder Screw and washer C-83 Flat Spring Thumb Screw and Lock Nut C-96 Dished Emery Wheel	.45	6
CG-1 TRIMMER GRINDER ASSEMBLY (complete) CG-5 Trimmer Clamp CG-6 Trimmer Adjusting Screw Complete	5.75 .25 .25	
LS-10 LOW SLUG ASSEMBLY (complete) LS-4 Register Plate	$\substack{15.00\\1.15}$	
C-34 Standard Emery Wheel ½ "x½" x½" x C-153 Saw Swage	1.25 1.50	

. 4

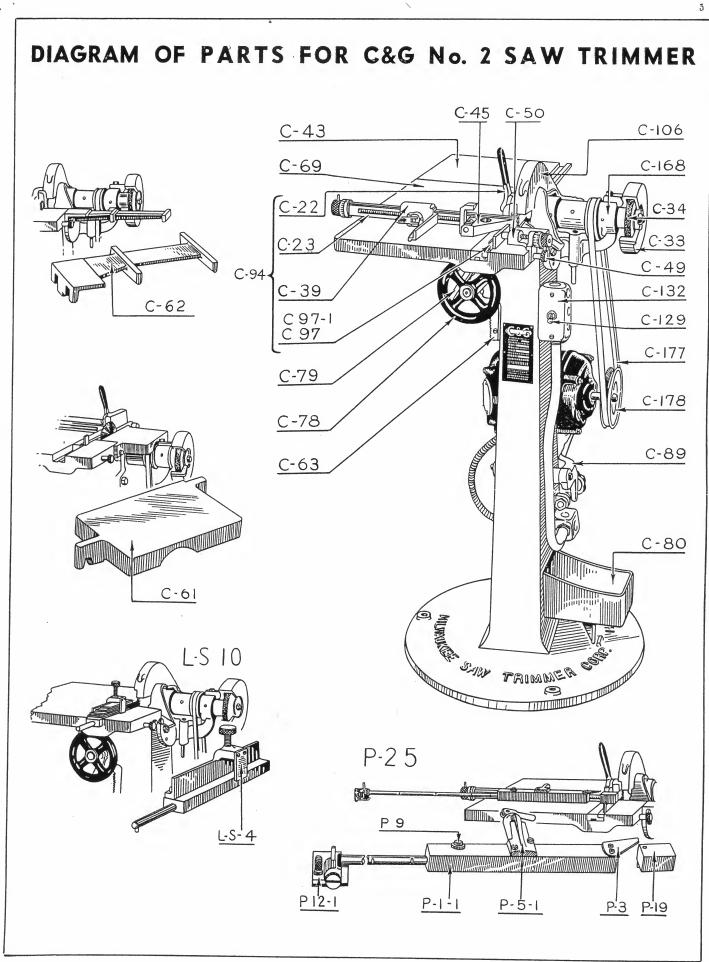

IMPROVED C&G ANGLE, GAUGE

6



Angle Gauge in position for cutting. Clamping provided for strip materials to lengths as short as one pica, and of all widths to 72 points. Handles angles from 2 to 88 degrees. Applied only on Nos. 3 and 3-A. Price \$75.00.

Protractor, for use with Angle Gauge, 30c.

IMPORTANT INFORMATION

Where possible wear might effect cut, trim and miter on C&G saw trimmers, adequate provision has been made to take care of these adjustments.

Loaner service for Gauge Frame Assembly repairs on all C&G saw trimmers, and for Mandrel Assemblies on Models 1 and 2. You pay only the express charges on loaners. This enables you to have use of your machine while work is being done at our factory, and assures a first-class job.

Always include serial number of your machine when ordering C&G parts and supplies.

When either Nos. 2, 3 or 3-A models are ordered equipped with Universal saw blades, credit will be allowed for Standard blades.

When ordering new C&G saw trimmers be sure to furnish complete motor information; otherwise it might delay shipment.

All prices quoted in this folder are subject to change without notice.

Motors are long hour duty, and if machines are equipped with 110 AC or DC current, standard lights can be used in lighting fixture.

Oiling Device should always be used with Universal saw blades. It spreads a thin film of oil on the blade, preventing metal from adhering to teeth, and also helps the cutting action. It is included in the deluxe and universal equipments.

When Miter and Linup Gauge is purchased with No. 3-A machine, credit will be allowed on Standard miter gauge.


If Right and Left Hand Miter Vise is purchased with No. 2 machine, credit will be allowed on Standard miter vise.

Shell plates require a smooth table top. A slot bar can be furnished for Nos. 3 and 3-A at \$5.50, and for No. 2 at \$4.50.

The Saw Grinder, for sharpening Universal blades on the machine, should always be purchased with these blades.

All materials used in C&G equipment are of the highest grade, and castings are heat treated to prevent distortion.

C&G ROUTER, JIGSAW AND TYPE-HIGH



Designed to enable printers to handle plate changes and corrections. You can drill, rout high spots, change key numbers, notch, mortise either outside or inside, and finish cuts to exact type heighth. Each end of machine operates independent of the other. Operate from light socket.

Stereotype casts — typehigh or shell plate — jigsawed readily when blade is lubricated. Oiling device furnished where this work is to be done. Subtable furnished on router end of either machine where shell plates are handled. Send for literature.

Specifications: Heighth overall 50", length 39", width 23", size of tables, jigsaw 17" x 15", router 18" x 16", heighth of table from fluor 38", distance from column to center of router or jigsaw table 11". Net weight 290 lbs., domestic shipping weight 385 lbs.

Standard equipment: 2 each Nos. 1, 2 and 3 jigsaw blades, and 1 each 1/16, $\frac{1}{3}$, 3/16, $\frac{1}{3}$, $\frac{1}{3}$, and $\frac{3}{3}$ inch router bits, 5 drills, 1 No. 2 broach, also dial indicator, typehigh gauge, work vice, lighting fixtures, switches, belt and 10 feet cord and plug. Price \$420.00. 390 -

Attachments: Circle Cutting attachment, Ellipse Cutting attachment. Shipped complete, ready to run with ¼ H.P. Universal motor for router, and ¼ H.P. repulsion motor for jigsaw.

C&G ROUTER AND TYPE-HIGH

Built for those who have but infrequent use for a jigsaw. If an office has even a moderate amount of mortising and irregular cutting, they should choose the complete Router and Jigsaw. Drilling, routing, and typehigh planing operations are the same for either machine. Send for literature.

Specifications: Heighth overall 50", length 25", width 18", size of table 18" x 16". heighth of table from floor 30", distance from column to center of table 11". Net weight 240 lbs., domestic shipping weight, 300 lbs.

Standard equipment: 1 each 1/16, ½, 3/16, ½, ½, and ¾ inch router bits, 5 drills, also dial indicator, typehigh gauge, work vise, lighting fixture, switch, belt, and 10 feet cord and plug. Price \$290.00, 2 5 -


Attachments: Circle Cutting attachment, Ellipse Cutting attachment.

Shipped complete, ready to run with ¼ H. P. Universal motor.

ι-
υ
35
60
0
)0
0

Intense competition in advertising creates a wide demand for the unusual. You can make your own tint blocks with the ellipse and circle attachments. Striking designs can be achieved, and cutting circular, and especially oval tint blocks, each geometrically exact, is the most unusual thing ever achieved on a router.




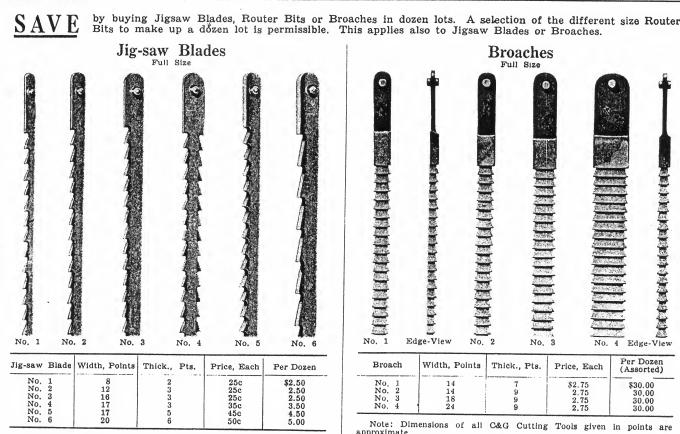

No. 5 Jigsaw Blade is extra heavy and specially designed for notching and sawing to gauge. Lighter ones may swerve in sawing a straight line.

No. 6 is for type-high stereo plates. Work should be fed slowly and blade oiled frequently. Extra heavy and strong.


With the proper blades you will never have any difficulty with the most exacting work. Be sure they are $C \propto G$ —you will get more use and satisfaction.




Router Bits shown are for a wide range of work. Made to the highest limit of

durance. Those marked by letters "A" and "D" are for cutting wood, electros, stereos and soft zinc. For cutting hard zinc or copper order those marked "B." Sharpen Router Bits by grinding end of bit, preserving original angle. All Drills and Router Bits have '4" shank.

PRICES Doz.	Each
Style "A"-1/16, 1/8, 3/16, 1/4\$4.00	\$.45
Style "A" $-1/2$.90
Style "D" $-3/4$, 2 lip,	1.60
Style "B"-1/16, 1/8, 3/16, 1/4 4.00	.45

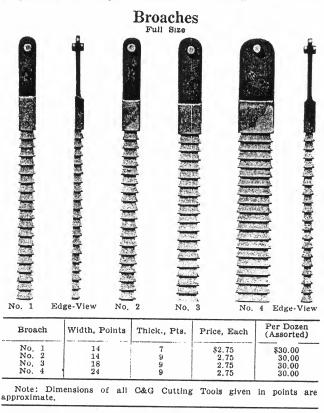


These finishing tools are used to square the walls of inside mortises. In finishing wood, wood-mounted electros and stereos, the maximum cut should not exceed one point; for wood-mounted halftones, zincs and solid metal bases, it should not exceed one-half point. No time is saved by taking off too much at one time. Following these suggestions will make the work better and the tools last longer. Have a complete assortment on hand and be sure they are C&G.




Jigsaw Blades. Price same as above. All equipment, accessories and supplies sold f. o. b. Milwaukee, Wisconsin. Prices subject to change without notice.

7



* @^{*}8

Illustration shows Universal saw blade in position for sharpening. This unit can be applied on all C&G Saw Trimmers for sharpening Universal saw blades. The Olling Device is also shown in position for the No. 2 machine. This feature is built into the Nos. 3 and 3-A models. Universal saw blades, grinding unit and olling device pay for themselves many times in direct savings over the Standard blades which must be swaged and filed. Price \$12.50.



Positive accuracy on the saw trimmer can be obtained only when the trimmers are kept sharpened and in good condition. The Trimmer Grinder makes it easy to keep trimmers sharp. The attachment definitely positions trimmers for the grinding operation and insures proper cutting angles while sharpening. Several sets of trimmers may be sharpened in a few minutes. The Trimmer Grinder is easy to oper-ate and requires no special experience. It is extra equipment that will save its small investment. It may be placed on outstanding machines. Price \$5.75.

UNIVERSAL SAW BLADE

(Illustration on front page)

Exclusive for C&G saw trimmers. Developed and patented to eliminate the need of changing saw blades when cutting hard materials. It has 30 formed teeth and is made of finest high speed tool steel. Due to the shape of the teeth the side clearance is maintained during its life. Cuts all materials commonly used in composing rooms, and stays sharp many times longer than ordinary saw blades when cutting softer materials. Price \$8.00.



C&G STRIP MATERIAL CABINET

Every saw trimmer owner can use tbis cabinet to advantage. Speeds production, places strip material where it belongs. Built of heavy sheet steel, height 34", length 24½", width 13", net weight 215 lbs., shipping weight 293 lbs. Holds over 1200 lbs of metal, and can be used with any saw trimmer. Top makes convenient work bench. Opening at top for tools and accessories or additional strip and basing material. Price \$35.00.

OUR GUARANTEE

Every C&G product is performanceguaranteed, and you can place your order with an understanding that you have the privilege to return equipment within ten days should you find it in any way misrepresented by us, and any money paid on same will be refunded.



No. 20

Keep your floors clean with waste receptacles - and save metal by keeping it clean. Handy for dump, makeup and ad room.

No. 20—16" high, 16" long, 11" wide; handle swivels to heighth of 26". Made of heavy sheet steel; has capacity of 1567 cu. in. Shipping weight 41 lbs. Price, with iron wheels \$14.50; with rubber tired wheels \$17.50.

No. 20 regular equipment with No. 3-A.




No. 21-14" high, 19" long, 13½ wide; back wall from which handle projects is 16" high; handle swivels to 26". Made of same material, capacity 2000 cu. in. Ship-ping weight 52 lbs. Price, with iron wheels \$16.50; with rubber tired wheels \$19.50.

No. 21 is an accessory for No. 3

MITER AND LINEUP GAUGE

The Miter and Line-up Gauge on No. 3 and 3-A has a non-ber of uses. It is to basically set all the gauges accurately, and definitely registers all rule sizes up to 72 points wide for mitering. Lines up odd indentions so that five inches of slugs can be sawed at one time. Display slugs regard-less of size, such as cast on Ludlow, All-Purpose Linotype, and Intertype can be registered for separating words or characters. It also affords a definite straight edge for lining up plate matter; Gauge may be adjusted to three positions up and down—first, for mitering; second, for lining up plate matter; third, for registering display slugs or aligning odd indentions. The sawed part of slug re-mains on sub-table. Micrometer adjustment permits defin-ite movement from right to left. Price \$22.50.

C&G SEE-THROUGH SAW GUARD



Easy to attach, swivels to side so regular guard can be used. Applies to Nos. 2, 3 and 3-A C&G Saw Trimmers. Price \$7.50.

MILWAUKEE SAW TRIMMER CORPORATION

610-612 E. Clybourn St. Milwaukee, Wis.

PRINTED IN U. S. A.